

outdoor



TRIPLE PLUS




3+8007
3+8001
3+8002


LED	Bridgelux SMD
Beam Angle	Diffuse : 120°
Tilt Rotation	Fixed
Material	Die-cast Aluminium
Diffuser	Polycarbonate
Colour	Black/White
Working Temperature	-20°C ~ +60°C
IK Rating	08
Mounting	Surface

Specifications


Code	Power (W)	Voltage (V)	Lumen Efficiency (Lm/W)	Colour Temperature (K)	CRI	IP Rating
3+8007	12W	220V-240V	110Lm/W	2700K-5000K	≥90	IP65
3+8001	20W	220V-240V	110Lm/W	2700K-5000K	≥90	IP65
3+8002	30W	220V-240V	110Lm/W	2700K-5000K	≥90	IP65



3+8007

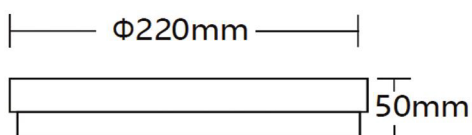

3+8001

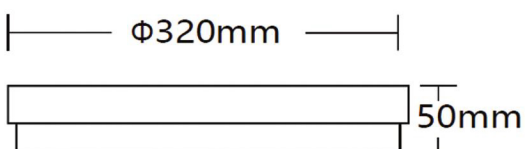

3+8002

