


indoor



TRIPLE PLUS



3+GL3003




3+GL3004




3+GL3005

Specifications


Code	Power (W)	Voltage (V)	Lumen Efficiency (Lm/W)	Colour Temperature (K)	CRI	IP Rating
3+GL3003	1x7W/ 1x10W/ 1x12W /GU10	220V-240V	110Lm/W	3000K-6000K	≥90	IP44
3+GL3004	2x7W/ 2x10W/ 2x12W /GU10	220V-240V	110Lm/W	3000K-6000K	≥90	IP44
3+GL3005	3x7W /3x10W/ 3x12W /GU10	220V-240V	110Lm/W	3000K-6000K	≥90	IP44



3+GL3003



3+GL3004

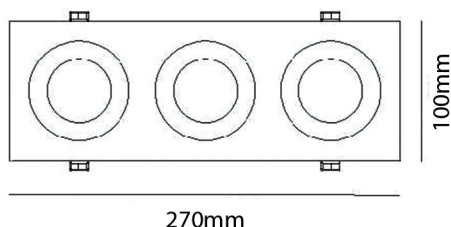

3+GL3005

LED GU10 / CREE / Bridgelux COB

Beam Angle Medium Beam : 30° / 40°
Wide Beam : 60°

Tilt Rotation Adjustable


Material Die-cast Aluminium

Diffuser Clear Glass / Polycarbonate

Colour White / Black / Grey

Working Temperature -20°C ~ +50°C

Any body RAL colour is available on demand



Height(m)	E(z)	Diameter(m)
1.0	2246.88	0.675
2.0	561.72	1.350
3.0	249.65	2.025
4.0	140.43	2.700
5.0	89.88	3.375
6.0	62.41	4.050

CREE **bridgelux**

CE **ERP** **RoHS** compliant

