

indoor



TRIPLE PLUS



3+4028






3+4029



3+4030

Specifications

Code	Power (W)	Voltage (V)	Lumen Efficiency (lm/W)	Colour Temperature (K)	CRI	IP Rating
3+4028	15W	220V-240V	110lm/W	3000K-5000K	≥90	IP44/IP54
3+4029	15W	220V-240V	110lm/W	3000K-5000K	≥90	IP44/IP54
3+4030	15W	220V-240V	110lm/W	3000K-5000K	≥90	IP44/IP54

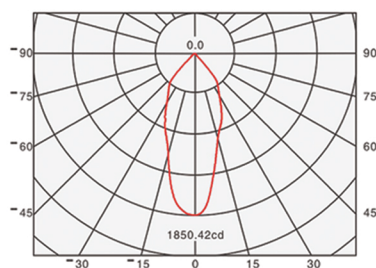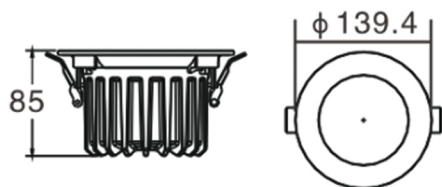

Height(m)	E(lx)	Diameter(m)
1.0	1815.54	0.758
2.0	453.89	1.515
3.0	201.73	2.273
4.0	113.47	3.031
5.0	72.62	3.789
6.0	50.43	4.546

LED	CREE LED
Beam Angle	40°
Tilt Rotation	Fixed
Material	Die-cast Aluminium
Diffuser	Clear Glass / Frosted
Reflector	Matt / Chrome / Mirror Finish
Colour	Ivory White
Working Temperature	-20°C ~ +50°C

IP65 and any body RAL colour is available on demand

CREE

CE **ERP** **RoHS compliant**

