

indoor



TRIPLE PLUS





3+HDL



3+HDL-SEN

Specifications

Code	Power (W)	Voltage (V)	Lumen Efficiency (lm/W)	Colour Temperature (K)	CRI	IP Rating
3+HDL-20 / 3+HDL-SEN-20	20W	220V-240V	110lm/W	3000K-5000K	≥90	IP44
3+HDL-24 / 3+HDL-SEN-24	24W	220V-240V	110lm/W	3000K-5000K	≥90	IP44

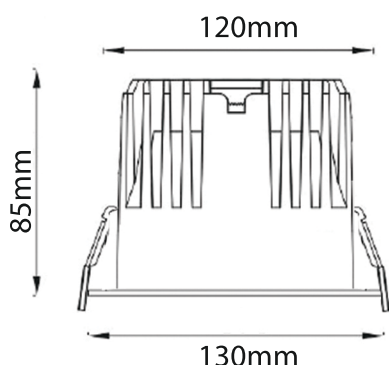

3+HDL-20 / 3+HDL-SEN-20

3+HDL-24 / 3+HDL-SEN-24

LED	Bridgelux COB
Beam Angle	15° / 24° / 36°
Tilt Rotation	Fixed
Material	Die-cast Aluminium
Diffuser	Clear glass
Reflector	Matt / Chrome / Mirror Finish
Colour	White / Black
Working Temperature	-20°C ~ +50°C

The light fittings come equipped with built-in sensors

