

# indoor



TRIPLE PLUS




3+MDL




3+MDL-SEN

## Specifications

| Code                       | Power (W) | Voltage (V) | Lumen Efficiency (Lm/W) | Colour Temperature (K) | CRI | IP Rating |
|----------------------------|-----------|-------------|-------------------------|------------------------|-----|-----------|
| 3+MDL-12 /<br>3+MDL-SEN-12 | 12W       | 220V-240V   | 110Lm/W                 | 3000K-5000K            | ≥90 | IP44      |
| 3+MDL-20 /<br>3+MDL-SEN-20 | 20W       | 220V-240V   | 110Lm/W                 | 3000K-5000K            | ≥90 | IP44      |
| 3+MDL-24 /<br>3+MDL-SEN-24 | 24W       | 220V-240V   | 110Lm/W                 | 3000K-5000K            | ≥90 | IP44      |

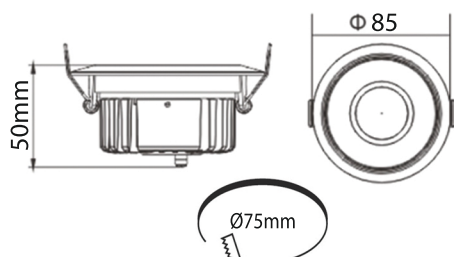

3+MDL-12 / 3+MDL-SEN-12

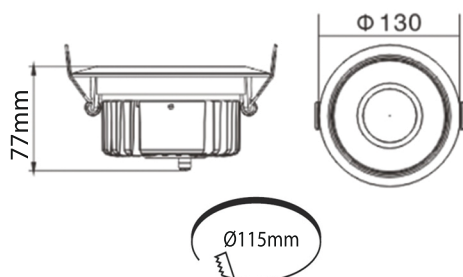

3+MDL-20 / 3+MDL-SEN-20

3+MDL-24 / 3+MDL-SEN-24

LED Bridgelux COB

Beam Angle 24°

Tilt Rotation Fixed

Material Die-cast Aluminium

Diffuser Clear glass


Reflector White / Black

Colour Sandy black / Sandy white

Working Temperature -20°C ~ +50°C

The light fittings come equipped with built-in sensors

Angle 24°



| Height(m) | E(h)    | Diameter(m) |
|-----------|---------|-------------|
| 1.0       | 5494.52 | 0.294       |
| 2.0       | 1373.63 | 0.587       |
| 3.0       | 610.50  | 0.881       |
| 4.0       | 343.41  | 1.174       |
| 5.0       | 219.78  | 1.468       |
| 6.0       | 152.63  | 1.761       |

