



TRIPLE PLUS

Flexible LED Strip Light



IP RATING 20




IP RATING 65 (SILICON COATED)


Code	Power(W)	Volatge(V)	Lumen/W	CCT	CRI	Cutting Lenght	IP
3+5630-COB	5W/Meter	12V / 24V	100-120Lm/Watt	2700K-6000K	≥90	Every 5cm	IP20/IP65
3+5630-COB	10W/Meter	12V / 24V	100-120Lm/Watt	2700K-6000K	≥90	Every 5cm	IP20/IP65

DIMENSIONS

3+5630-COB-IP20

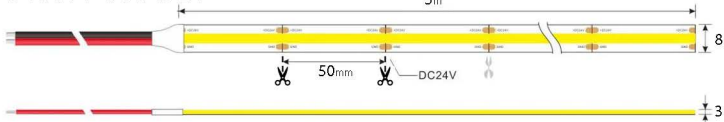

3+5630-COB-IP65 (Silicon Coated)

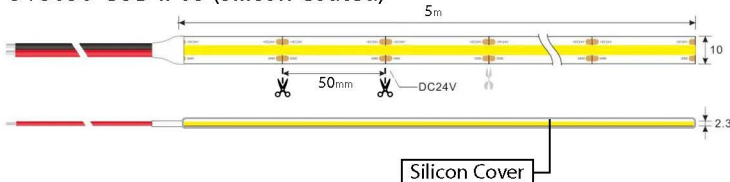

LED

EPISTAR / Bridgelux SMD

Beam Angle

Diffused Beam : 120°

Working Temperature

-20°C ~ +55°C



EPISTAR



MONOCOLOR STRIP INSTALLING OPTION

35W(IP20)

35W(IP67) **5W/Meter**

50W(IP20)

60W(IP67) **10W/Meter**