

indoor



3+6028






3+6029



3+6030

Specifications

Code	Power (W)	Voltage (V)	Lumen Efficiency (Lm/W)	Colour Temperature (K)	CRI	IP Rating
3+6028	40W	220V-240V	110Lm/W	3000K-5000K	≥90	IP44/IP54
3+6029	40W	220V-240V	110Lm/W	3000K-5000K	≥90	IP44/IP54
3+6030	40W	220V-240V	110Lm/W	3000K-5000K	≥90	IP44/IP54

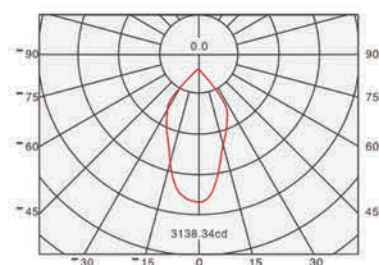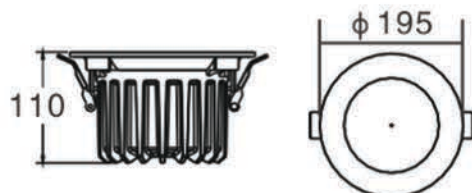

Height(m)	Ft(lx)	Diameter(m)
1.0	3138.34	1.015
2.0	784.59	2.029
3.0	348.70	3.044
4.0	198.15	4.059
5.0	125.53	5.073
6.0	87.18	6.088

LED	CREE LED
Beam Angle	40° / 46°
Tilt Rotation	Fixed
Material	Die-cast Aluminium
Diffuser	Clear Glass / Frosted
Reflector	Matt / Chrome / Mirror Finish
Colour	Ivory White
Working Temperature	-20°C ~ +50°C

IP65 and any body RAL colour is available on demand

CREE

CE ERP RoHS compliant

SASO TUV SAA SGS

QAL DALI

DIMMABLE