

# indoor



TRIPLE PLUS



3+5028






3+5029



3+5030

## Specifications

| Code   | Power (W) | Voltage (V) | Lumen Efficiency (Lm/W) | Colour Temperature (K) | CRI | IP Rating |
|--------|-----------|-------------|-------------------------|------------------------|-----|-----------|
| 3+5028 | 30W       | 220V-240V   | 110Lm/W                 | 3000K-5000K            | ≥90 | IP44/IP54 |
| 3+5029 | 30W       | 220V-240V   | 110Lm/W                 | 3000K-5000K            | ≥90 | IP44/IP54 |
| 3+5030 | 30W       | 220V-240V   | 110Lm/W                 | 3000K-5000K            | ≥90 | IP44/IP54 |

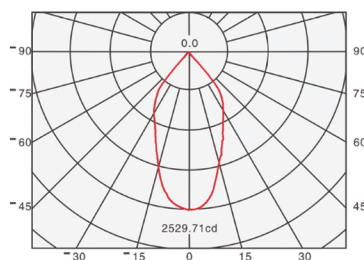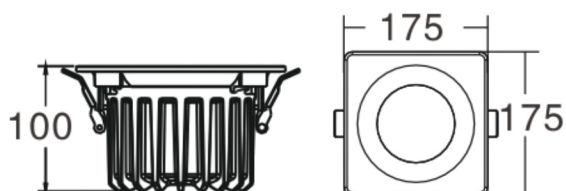

| Height(m) | E(lx)   | Diameter(m) |
|-----------|---------|-------------|
| 1.0       | 2529.71 | 0.784       |
| 2.0       | 632.43  | 1.568       |
| 3.0       | 281.08  | 2.351       |
| 4.0       | 158.11  | 3.135       |
| 5.0       | 101.19  | 3.919       |
| 6.0       | 70.27   | 4.703       |

|                     |                               |
|---------------------|-------------------------------|
| LED                 | CREE LED                      |
| Beam Angle          | 42° / 50°                     |
| Tilt Rotation       | Fixed                         |
| Material            | Die-cast Aluminium            |
| Diffuser            | Clear Glass / Frosted         |
| Reflector           | Matt / Chrome / Mirror Finish |
| Colour              | Ivory White                   |
| Working Temperature | -20°C ~ +50°C                 |

IP65 and any body RAL colour is available on demand

