

# indoor



3+8028





3+8029



3+8030

## Specifications

| Code   | Power (W) | Voltage (V) | Lumen Efficiency (lm/W) | Colour Temperature (K) | CRI | IP Rating |
|--------|-----------|-------------|-------------------------|------------------------|-----|-----------|
| 3+8028 | 50W       | 220V-240V   | 110lm/W                 | 3000K-5000K            | ≥90 | IP44/IP54 |
| 3+8029 | 50W       | 220V-240V   | 110lm/W                 | 3000K-5000K            | ≥90 | IP44/IP54 |
| 3+8030 | 50W       | 220V-240V   | 110lm/W                 | 3000K-5000K            | ≥90 | IP44/IP54 |

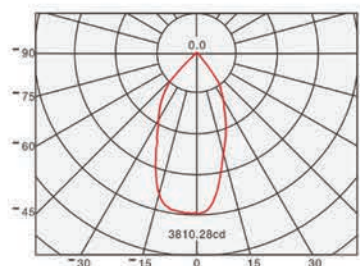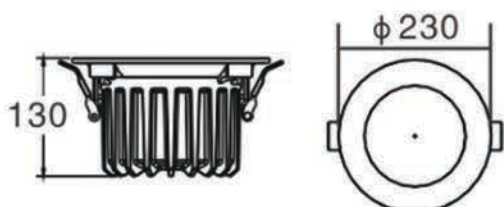

| Height(m) | E(dc)   | Diameter(m) |
|-----------|---------|-------------|
| 1.0       | 3810.28 | 0.933       |
| 2.0       | 952.57  | 1.865       |
| 3.0       | 423.36  | 2.798       |
| 4.0       | 238.14  | 3.730       |
| 5.0       | 152.41  | 4.663       |
| 6.0       | 105.84  | 5.596       |

|                     |                               |
|---------------------|-------------------------------|
| LED                 | CREE LED                      |
| Beam Angle          | 44° / 50°                     |
| Tilt Rotation       | Fixed                         |
| Material            | Die-cast Aluminium            |
| Diffuser            | Clear Glass / Frosted         |
| Reflector           | Matt / Chrome / Mirror Finish |
| Colour              | Ivory White                   |
| Working Temperature | -20°C ~ +50°C                 |

IP65 and any body RAL colour is available on demand

**CREE** 

**CE**  **ERP**  **RoHS** compliant

