

indoor



3+8028





3+8029



3+8030

Specifications

Code	Power (W)	Voltage (V)	Lumen Efficiency (lm/W)	Colour Temperature (K)	CRI	IP Rating
3+8028	50W	220V-240V	110lm/W	3000K-5000K	≥90	IP44/IP54
3+8029	50W	220V-240V	110lm/W	3000K-5000K	≥90	IP44/IP54
3+8030	50W	220V-240V	110lm/W	3000K-5000K	≥90	IP44/IP54

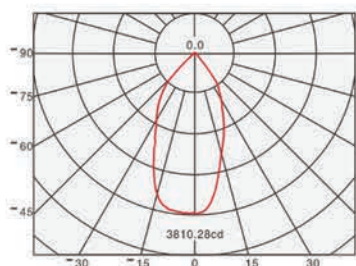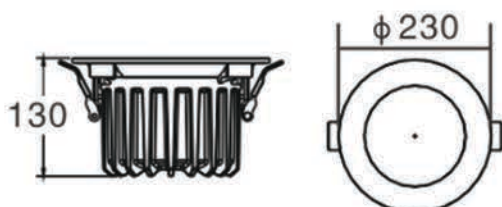

Height(m)	E(dc)	Diameter(m)
1.0	3810.28	0.933
2.0	952.57	1.865
3.0	423.36	2.798
4.0	238.14	3.730
5.0	152.41	4.663
6.0	105.84	5.596

LED	CREE LED
Beam Angle	44° / 50°
Tilt Rotation	Fixed
Material	Die-cast Aluminium
Diffuser	Clear Glass / Frosted
Reflector	Matt / Chrome / Mirror Finish
Colour	Ivory White
Working Temperature	-20°C ~ +50°C

IP65 and any body RAL colour is available on demand

CREE 

CE  **ERP**  **RoHS compliant**



006